

Electrical Specifications

Frequency Range: 10-1000 MHz
Insertion Loss: 1.6 dB Max.
Isolation: 23 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 5° Max.
VSWR: 1.40:1 Max.
Power Rating: 1 Watts Max.


Mechanical

Mounting Method: Surface Mount
Dimensions: 0.800 x 0.400 x 0.250 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

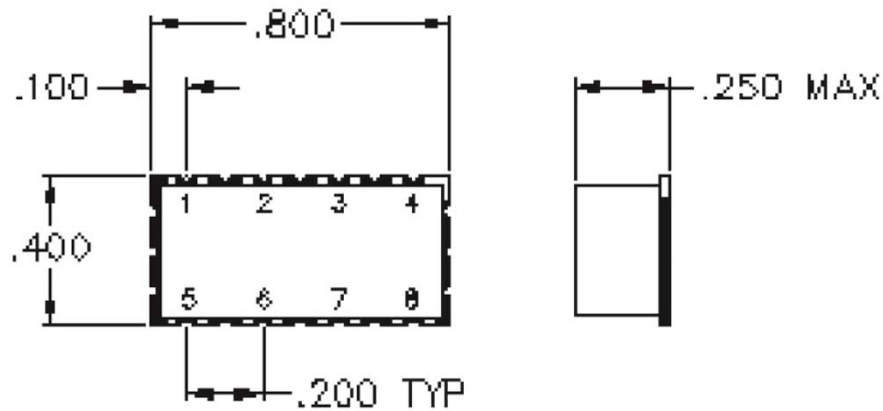

Port Configuration:
Input: 3
Output: 5, 6, 7, 8
Ground: Others