

Electrical specifications

Frequency range: 0.004-60 MHz

Return loss: 18 dB

Insertion loss: 0.8 dB max

Amplitude Balance: 0.1 dB max

Phase Balance: 1.0° max

Isolation: 25 dB min

Input Power: 1 Watt max

Mechanical

Mounting Method: Thru Holes

Connector Type: SMA (F)

Dimensions: 0.90 x 0.70 x 0.50

Environmental


Operating Temperature: -40°C to +85°C

Storage Temperature: -55°C to -125°C

Shock: 20 G. 11 ms.

Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

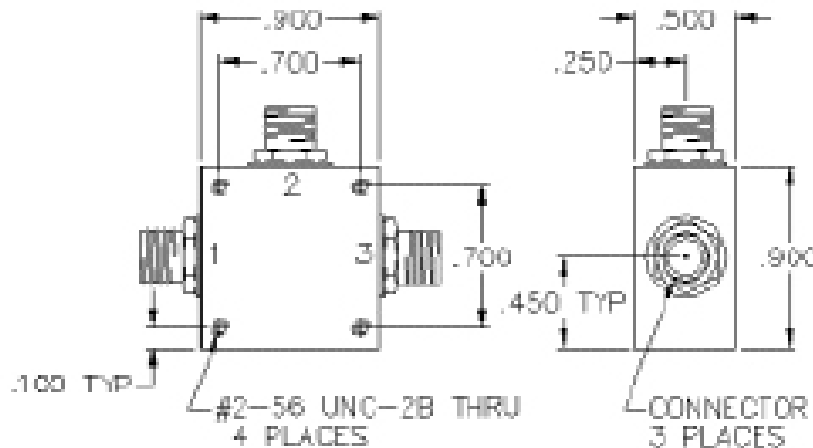

Port Configuration

Input: 2

Outputs: 1, 3