

Electrical specifications

Frequency range: 0.01-30 MHz
Return loss: 14 dB
Insertion loss: 1.5 dB max
Amplitude Balance: 0.3 dB max
Phase Balance: 5.0° max
Isolation: 22 dB min
Input Power: 1 Watts max


Mechanical

Mounting Method: Mounting Holes
Connector Type: N
Dimensions: 32.00 x 3.60 x 1.00 in

Environmental

Operating Temperature: -40 to +85 °C
Storage Temperature: -55 to +125 °C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz

Outline Drawing:

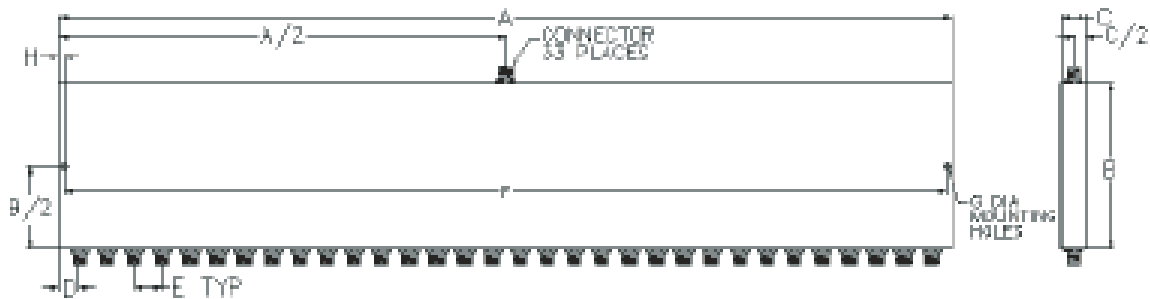

Dimensions:

A: 32.00	B: 3.60
C: 1.00	D: .50
E: 1.00	F: 31.50
G: .149	H: .250