

Electrical specifications

Frequency range: 0.01-60 MHz
Return loss: 18 dB
Insertion loss: 0.8 dB max
Amplitude Balance: 0.2 dB max
Phase Balance: 2.0° max
Isolation: 20 dB min
Input Power: 1 Watt max


Mechanical

Mounting Method: Surface Mount
Dimensions: 0.800 x 0.400 x 0.250 in.

Environmental

Operating Temperature: -40°C to +75°C

Outline Drawing:

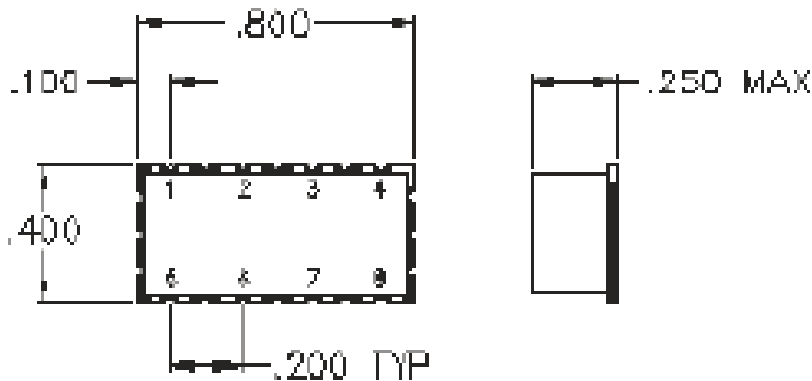

Port Configuration

Input: 2
Outputs: 1,4,5,8
Ground: 3,6,7