

Electrical Specifications

Frequency range: 0.05-100 MHz
Insertion loss: 1.6 dB Max.
Isolation: 20 dB Min.
Amplitude Balance: 0.5 dB Max.
Phase Balance: 9° Max.
VSWR: 1.50:1 Max.
Power Rating: 1 Watt Max.


Mechanical

Mounting Method: Mounting Holes
Dimensions: 12.80 x 3.50 x 0.40 in.

Environmental

Operating Temperature: -40°C to +75°C

Outline Drawing:

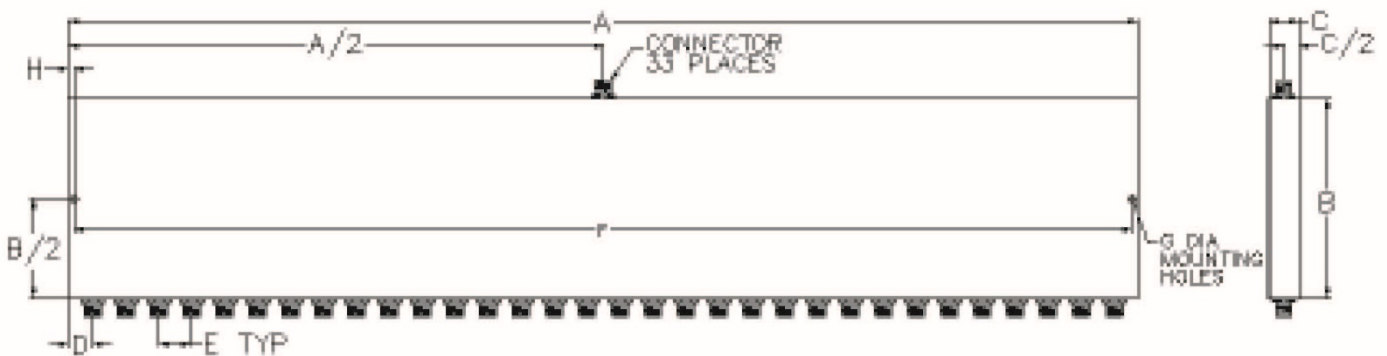

Dimensions:

A: 12.80	B: 3.5
C: 0.40	D: .20
E: 0.40	F: 12.3
G: .149	H: .25