

Electrical specifications

Frequency range: 0.3-60 MHz
Return loss: 18 dB
Insertion loss: 0.5 dB max
Amplitude Balance: 0.1 dB max
Phase Balance: 1.0° max
Isolation: 30 dB min
Impedance: 50 ohms
Input Power: 1 Watt max


Mechanical

Mounting Method: Surface Mount
Dimensions: 0.310 x 0.250 x 0.200 in

Environmental

Operating Temperature: -40 to +75 °C

Outline Drawing:

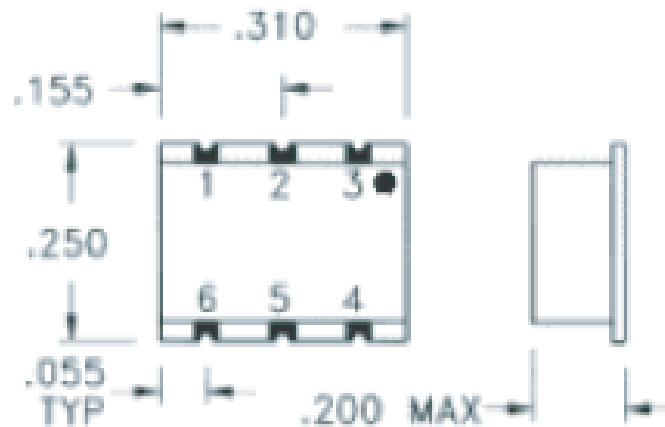

Port Configuration

Input: 6
 Outputs: 4,3
 Ground: 1,2,5