

Electrical Specifications

Frequency range: 0.5-100 MHz

Return loss: 18 dB

Insertion loss: 0.5 dB max

Amplitude Balance: 0.2 dB max

Phase Balance: 2° max

Isolation: 30 dB max

Power: 1 Watt max

Mechanical

Mounting Method: Thru Holes

Connector Type: SMA (F)

Dimensions: 0.900 x 0.900 x 0.500 in

Environmental


Operating Temperature: -40C to +85C

Storage Temperature: -55C to +125C

Shock: 20 G 11 ms

Vibration: 20 G 5 to 200 Hz

Outline Drawing:

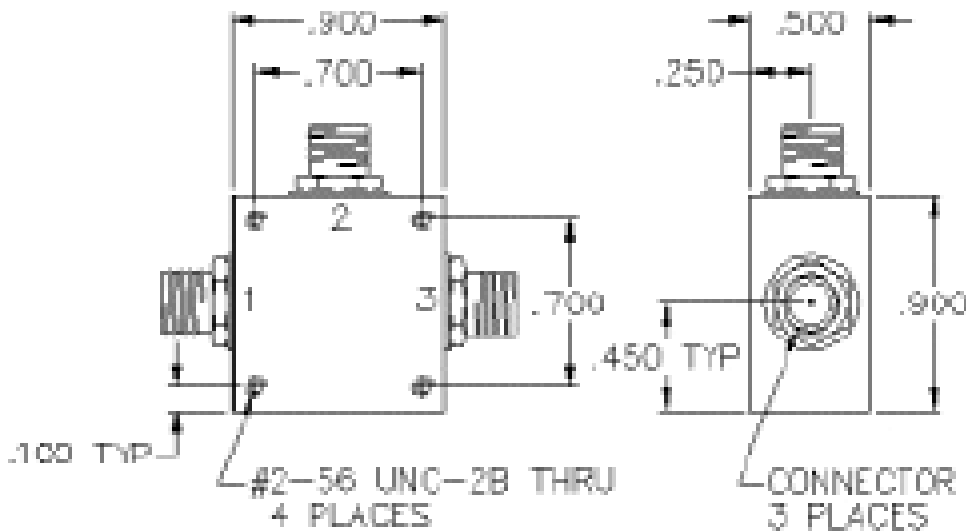

Port Configuration

Input: 2

Outputs: 1, 3