

Electrical Specifications

Frequency range: 0.5-100 MHz

Return loss: 18 dB

Insertion loss: 0.5 dB max

Amplitude Balance: 0.2 dB max

Phase Balance: 2.0 max

Isolation: 25 dB min

Power: 1 Watt max

Mechanical


Mounting Method: Surface Mount

Dimensions: 0.310 x 0.250 x 0.200 in

Environmental

Operating Temperature: -40°C to +75°C

Outline Drawing:

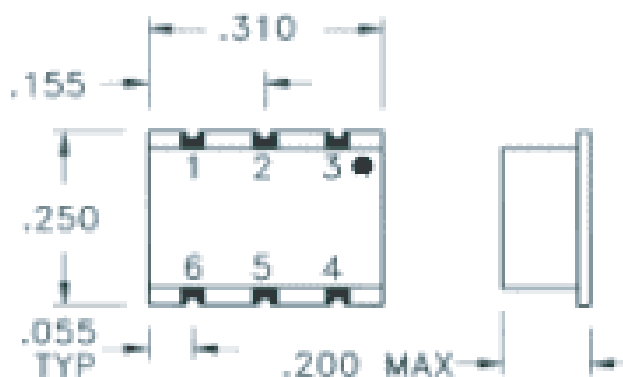

Port Configuration

Input : 6

Outputs: 4,3

Ground:1, 2, 5