

Electrical Specifications

Frequency range: 0.5-100 MHz
Return loss: 18 dB
Insertion loss: 1 dB max
Amplitude Balance: 0.2 dB max
Phase Balance: 2° max
Isolation: 25 dB max
Input Power: 1 Watt max


Mechanical

Mounting Method: Surface Mount
Dimensions: 0.810 x 0.810 x 0.150 in

Environmental

Operating Temperature: -40°C to 75°C

Outline Drawing:

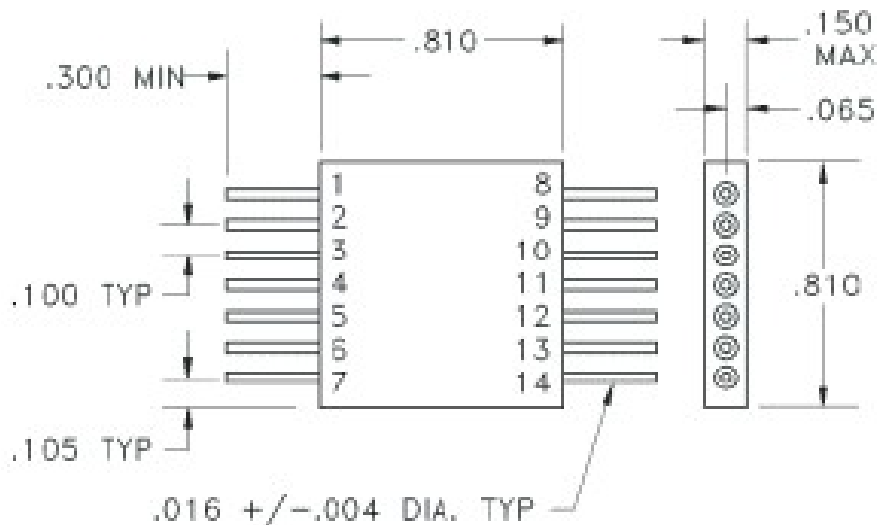

Port Configuration

Input : 1

Outputs: 4 ,7, 11, 14

Ground: 2 ,3, 5, 6, 8-10, 12,13