

Electrical Specifications

Frequency range: 1-200 MHz
Insertion loss: 1.4 dB Max.
Isolation: 20 dB Min.
Amplitude Balance: 0.5 dB Max.
Phase Balance: 8° Max.
VSWR: 1.40:1 Max.
Power Rating: 1 Watt Max.


Mechanical

Mounting Method: Mounting Holes
Connector Type: SMA
Dimensions: 6.40 x 2.85 x 0.40 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

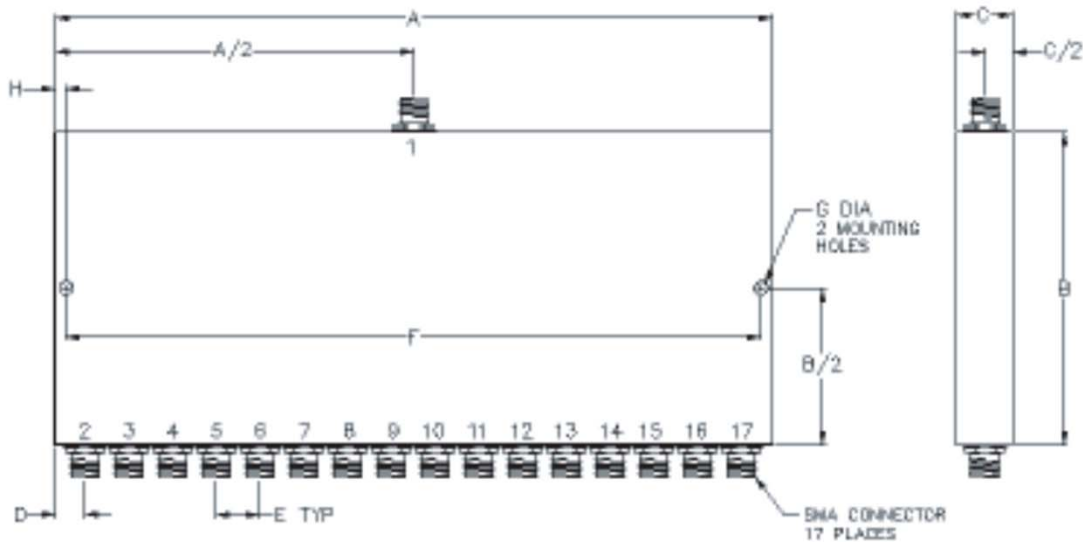

Dimensions:

A: 6.40	B: 2.
C: 0.40	D: .2
E: 0.40	F: 5.
G: .149	H: .2