

Electrical Specifications

Frequency Range: 10-1000 MHz
Insertion Loss: 2.5 dB Max.
Isolation: 22 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 6° Max.
VSWR: 1.50:1 Max.
Power Rating: 1 Watts Max.


Mechanical

Mounting Method: Surface Mount
Dimensions: 1.000 x 1.000 x 0.150 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

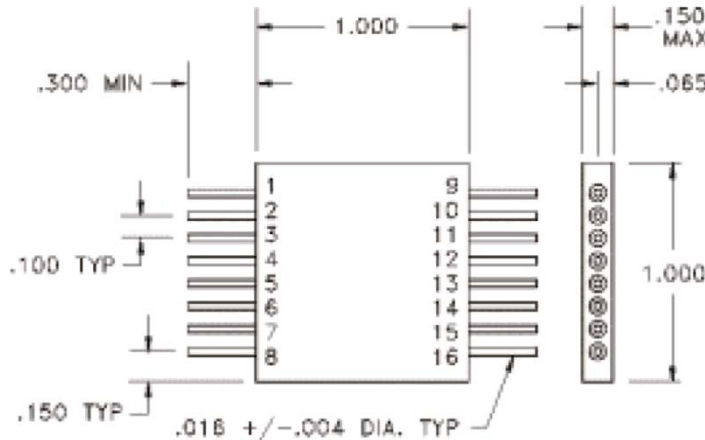

Port Configuration:

Input: 4
 Output: 9, 10, 12, 13, 15, 16
 Ground: 1-3, 5-8, 11, 14