

Electrical Specifications

Frequency Range: 10-1000 MHz
Insertion Loss: 2.2 dB Max.
Isolation: 22 dB Min.
Amplitude Balance: 0.6 dB Max.
Phase Balance: 8° Max.
VSWR: 1.40:1 Max.
Power Rating: 1 Watts Max.


Mechanical

Mounting Method: Surface Mount
Dimensions: 1.00 x 1.00 x 0.150 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

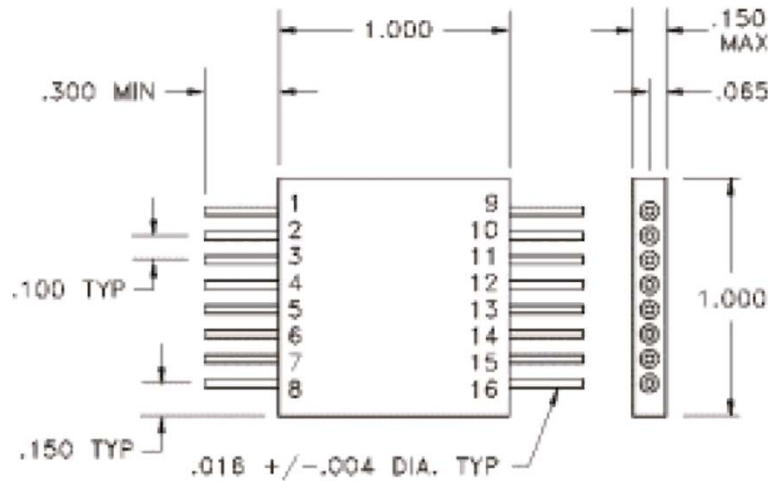

Port Configuration:
 Input: 4
 Outputs: 9-16
 Ground: 1-3, 5-8