

**Electrical Specifications**

**Frequency Range:** 1700-2200 MHz

**Insertion Loss:** 1.4 dB Max.

**Isolation:** 20 dB Min.

**Amplitude Balance:** 0.5 dB Max.

**Phase Balance:** 4° Max.

**VSWR:** 1.35:1 Max.

**Input Power:** 1 Watt Max.

**Mechanical**

**Mounting Method:** Surface Mount

**Dimensions:** 0.800 x 0.400 x 0.250 in.

**Environmental**


**Operating Temperature:** -40 to +80°C

**Storage Temperature:** -55 to +120°C

**Shock:** 20 G. 11 ms.

**Vibration:** 20 G. 5 to 200 Hz.

**Outline Drawing:**

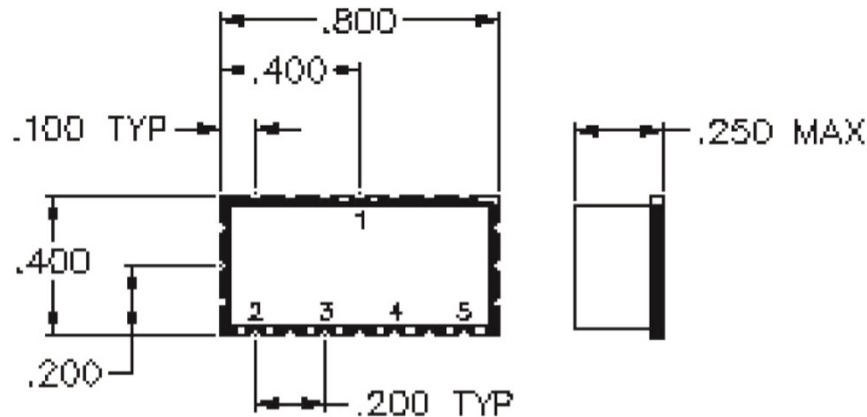

Port Configuration

Input: 1

Output: 2, 3, 4, 5

Ground: Others