

Electrical Specifications

Frequency Range: 20-1500 MHz

Insertion Loss: 2.3 dB Max.

Isolation: 20 dB Min.

Amplitude Balance: 0.4 dB Max.

Phase Balance: 6° Max.

VSWR: 1.50:1 Max.

Power Rating: 1 Watt Max.

Mechanical

Mounting Method: Threaded Mounting Holes

Dimensions: 1.250 x 1.250 x 0.750 in.

Environmental

Operating Temperature: -40 to +85°C


Storage Temperature: -55 to +125°C

Shock: 20 G. 11 ms.

Vibration: 20 G. 5 to 200 Hz.

*Note: Available with BNC, TNC, F, and N connectors.

Outline Drawing:

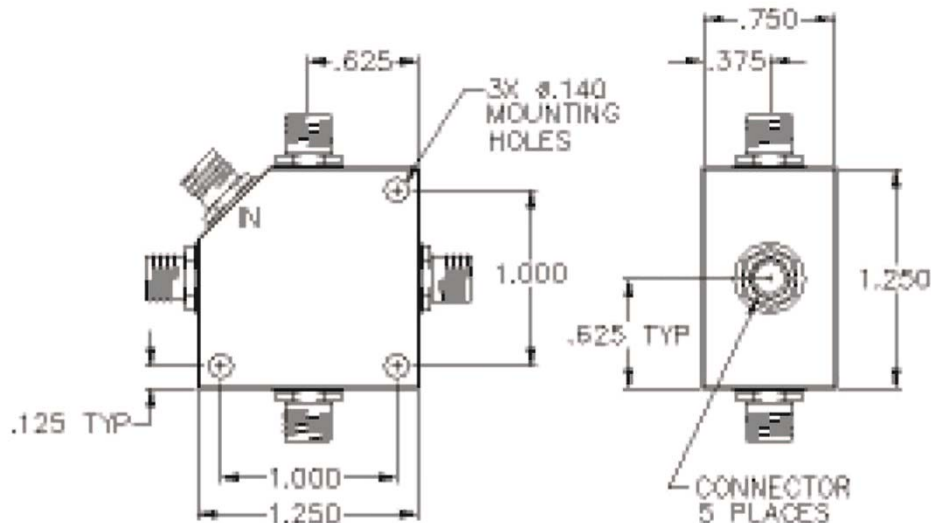

Port Configuration

Input: 1

Output: 2, 3, 4, 5

Ground: Housing