

Electrical Specifications

Frequency Range: 20-1600 MHz
Insertion Loss: 5 dB Max.
Isolation: 18 dB Min.
Amplitude Balance: 0.6 dB Max.
Phase Balance: 10° Max.
VSWR: 1.60:1 Max.
Power Rating: 1 Watt Max.


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N-Type
Dimensions: 16.0 x 2.90 x 1.00 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

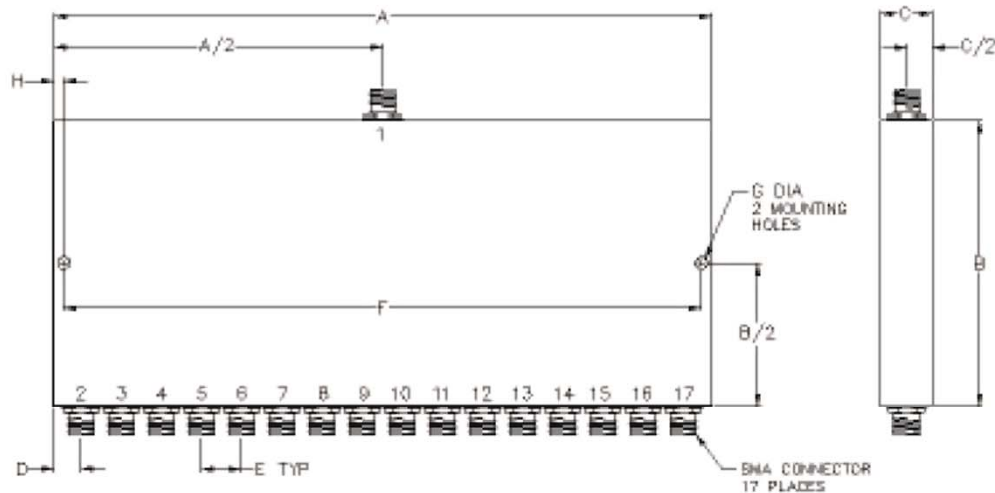

Dimensions:

A: 16.00□	B: 2.90
C: 1.00□	D: .50
E: 1.00□	F: 15.50
G: .149□	H: .250