

**Electrical Specifications**

**Frequency Range:** 20-2000 MHz  
**Insertion Loss:** 2.6 dB Max.  
**Isolation:** 20 dB Min.  
**Amplitude Balance:** 0.4 dB Max.  
**Phase Balance:** 6° Max.  
**VSWR:** 1.60:1 Max.  
**Power Rating:** 1 Watt Max.

**Mechanical**


**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 1.250 x 1.250 x 0.750 in.

**Environmental**

**Operating Temperature:** -40 to +85°C  
**Storage Temperature:** -55 to +125°C  
**Shock:** 20 G. 11 ms.  
**Vibration:** 20 G. 5 to 200 Hz.

\*Note: Available with BNC, TNC, F, and N connectors.

**Outline Drawing:**

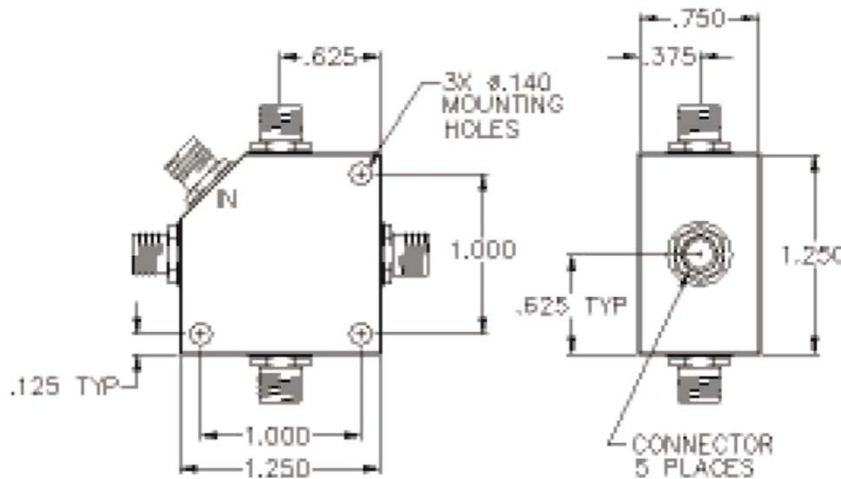

Port Configuration  
Input: 1  
Output: 2, 3, 4, 5  
Ground: Housing