

**Electrical Specifications**

**Frequency range:** 20-400 MHz  
**Insertion Loss:** 0.6 dB Max.  
**Isolation:** 20 dB Min.  
**Amplitude Balance:** 0.5 dB Max.  
**Phase Balance:** 6° Max.  
**VSWR:** 1.30:1 Max.  
**Input Power:** 400 Watts Max.


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** N-Type  
**Dimensions:** 4.00 x 3.40 x 1.00 in.

**Environmental**

**Operating Temperature:** -40 to +85°C  
**Storage Temperature:** -55 to +125°C  
**Shock:** 20 G. 11 ms.  
**Vibration:** 20 G. 5 to 200 Hz.

**Outline Drawing:**

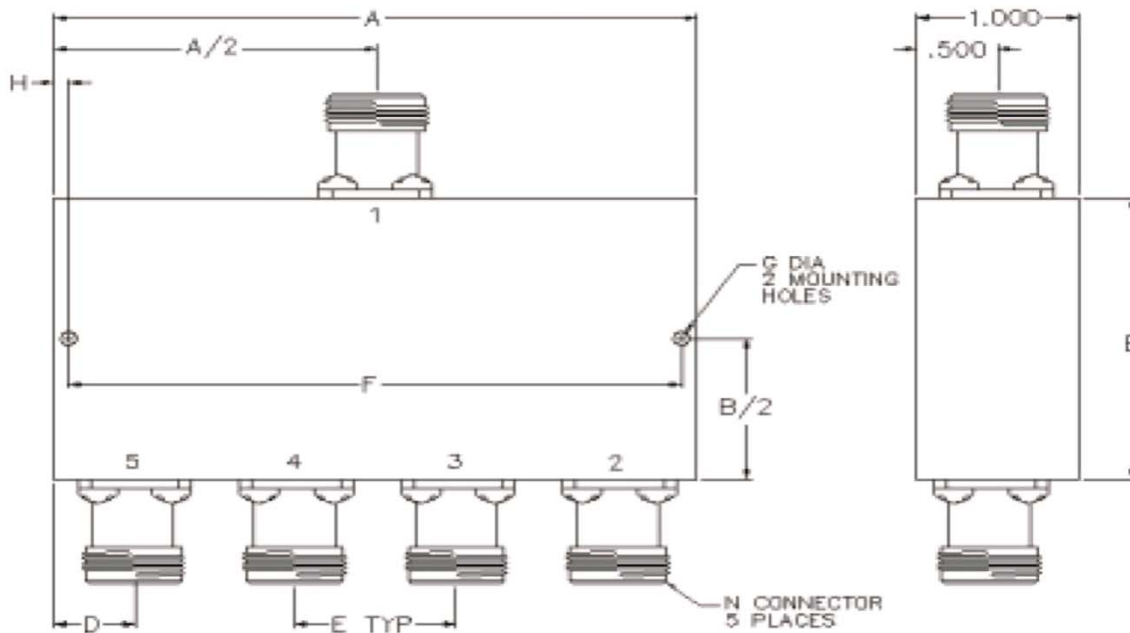

Port Configuration

A: 4.00	B: 3.40
C: 1.00	D: 0.50
E: 1.00	F: 3.75
G: 0.125	H: 0.125