

Electrical Specifications

Frequency Range: 2000-18000 MHz

Coupling: 15 ± 1.8 dB

Insertion Loss: 1.0 dB Max.

Coupling Flatness: ± 1.0 dB Max.

Directivity: 12 dB Min.

VSWR: 1.70:1 max

Input Power: 20 Watts Max.

Impedance : 50 ohms

Mechanical

Mounting Method: 4-40 Threaded Holes

Connector Type: SMA(F)


Dimensions: 2.25 x 0.73 x 0.5 in.

Environmental

Operating Temperature: -45°C to +85°C

Storage Temperature: -55°C to +100°C

Outline Drawing:

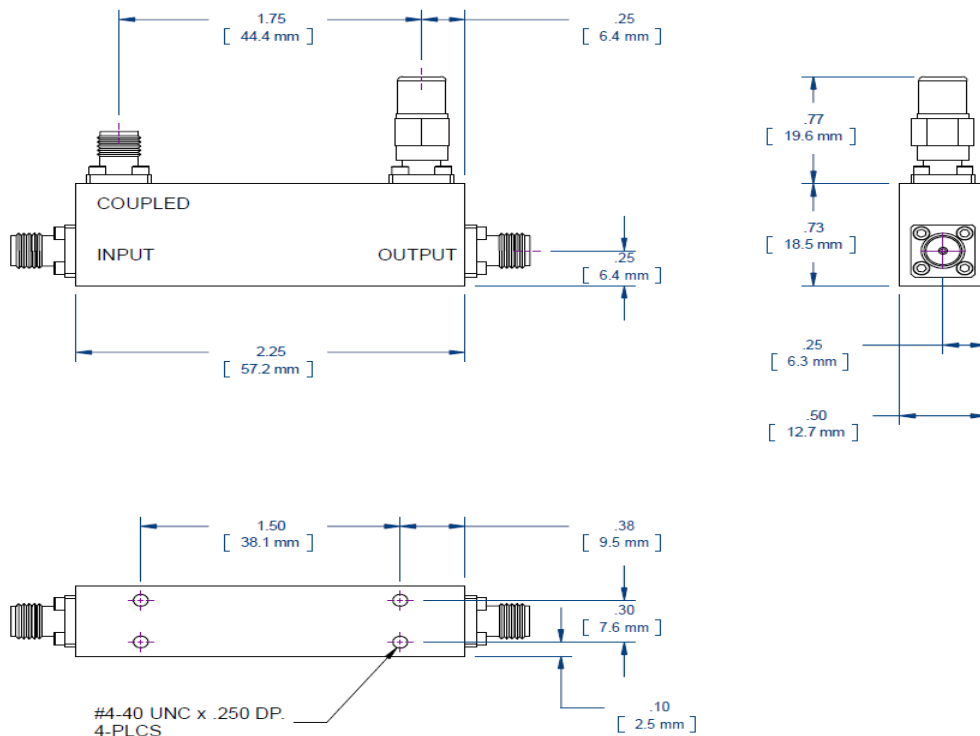

UNLESS OTHERWISE SPECIFIED: Dimensions are in inches, [mm] shown for convenience.
Tolerances on 2-pl decimals: ± 0.03 . 3-pl decimals: ± 0.015 . Angles: $\pm 1^\circ$.

Response Plots:

