

Electrical Specifications

Frequency Range: 2.0-6.0 GHz
Insertion Loss : 0.9 dB Max.
Isolation: 16 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 7.0° Max.
VSWR: 1.50:1 Max.


Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: N-Type
Dimensions: 3.20 x 1.50 x 1.00 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +95°C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz.

Outline Drawing:

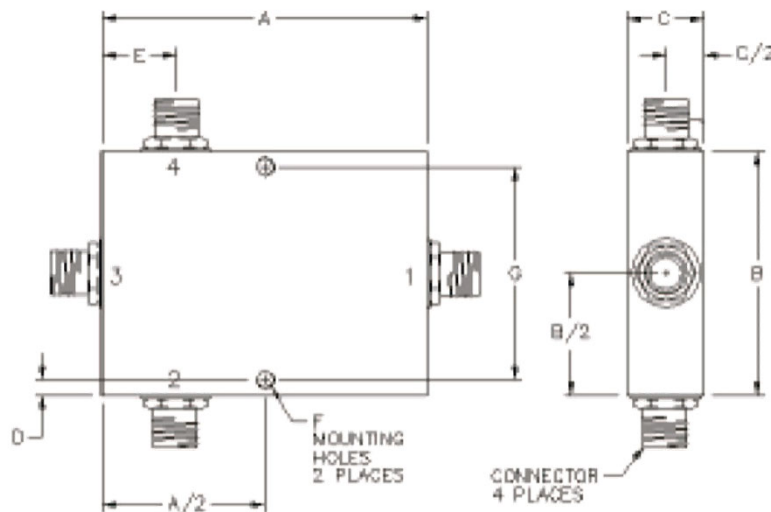

A: 3.20 B: 1.50
 C: 1.00 D: 0.125
 E: 0.59 F: 0.125
 G: 1.25