20000 MHz Terminator

Part Number: AM20000T001-SF

Electrical Specifications

Frequency Range: DC ~ 20.0 GHz
Impedance: 50 Ohms
VSWR: 1.22:1
RF Power: 1 Watt at average 25˚C (Peak 1 Kw)

Mechanical

Connector Type: SMA Female
Dimensions: 15.0 x ø6.5 mm

Environmental

Operating Temperature: -55'C ~ 125'C

Outline Drawing:

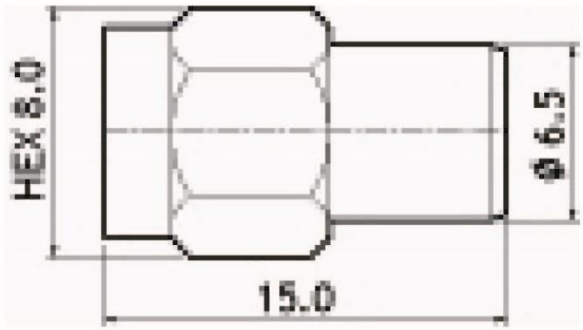

Anatech Microwave Company

70 Outwater Lane Garfield, NJ 07026, USA

Phone: (973) 772-4242

Email: sales@anatechmicrowave.com

Web: www.anatechmicrowave.com

ANATECH MICROWAVE COMPANY

20000Terminator

Part Number: AM20000T001-SF

Test Data:

Return Loss Guide

DC ~ 4Ghz : 32 dB Max

4Ghz ~ 12Ghz : 25dB Max

12Ghz ~ 20Ghz : 20dB Max

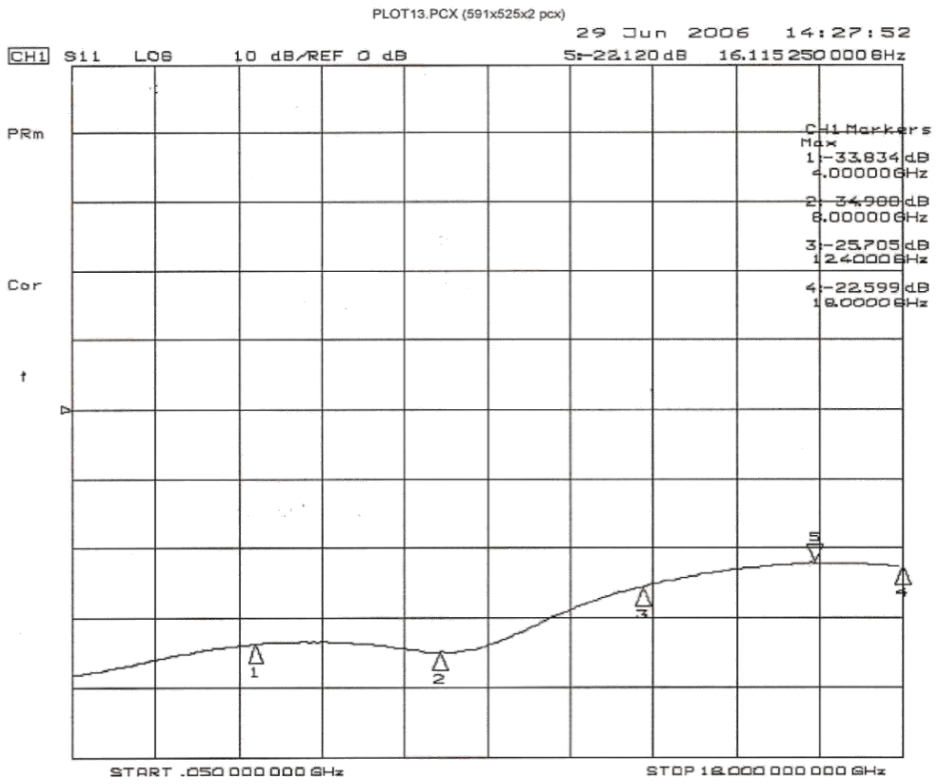

Anatech Microwave Company

70 Outwater Lane Garfield, NJ 07026, USA

Phone: (973) 772-4242

Email: sales@anatechmicrowave.com

Web: www.anatechmicrowave.com