

Electrical Specifications

Frequency Range: DC-4.0 GHz

Attenuation: 3 dB

Attenuation Tolerance:

DC-1.0 GHz; ± 0.25 dB

1.0-4.0 GHz; ± 0.50 dB

VSWR:

DC-1.0 GHz; 1.15:1 Max.

1.0-4.0 GHz; 1.35:1 Max.

Average Power: 20 Watts

Peak Power: 1000 Watts

Mechanical

Connector Type: N-Type (M/F)


Dimensions: 3.71 x 1.75 Inches.

Environmental

Operating Temperature: -55°C to +85°C

Storage Temperature: -65°C to +105°C

Outline Drawing:

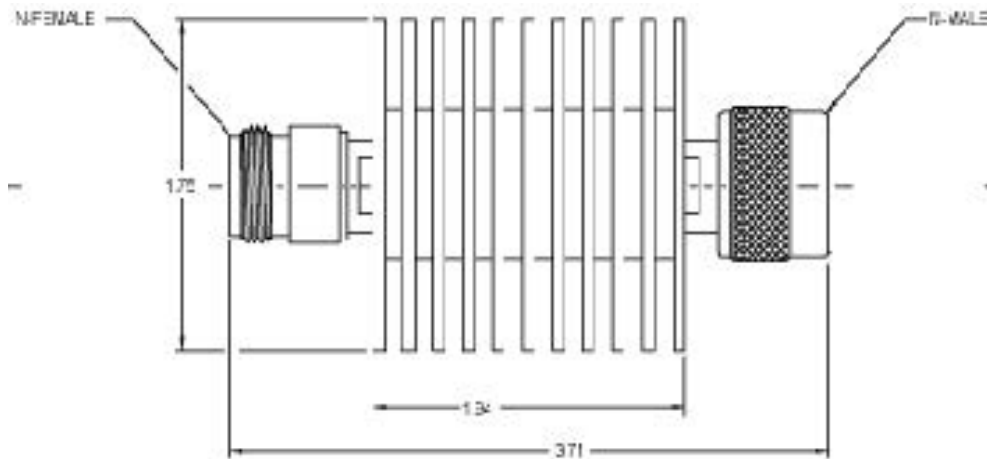

Response Plot:

