4000 MHz Attenuator

Part Number: AM4000AT006-TNC-MF

Electrical Specifications

Frequency Range: DC-4 GHz
Attenuation Tolerance:
6 dB +/-0.75 dB @ DC-2 GHz
6 dB +/- 1.25 dB @ 2-4 GHz
VSWR:
1.25:1 @ DC-2 GHz
1.45:1 @ 2-4 GHz
Impedance: 50 Ohms
Average Power: 2 Watts @ +25°C
Derates Linearly to 0 Watts @ +125°C
Peak Power: 1kW (1 usec pulse, 0.5% duty cycle)

Mechanical

Connector Type: TNC (M) to TNC (F)
Dimensions: 1.82 Inches.

Environmental

Operating Temperature: -55˚C to +85˚C
Storage Temperature: -65˚C to +105˚C

Outline Drawing:

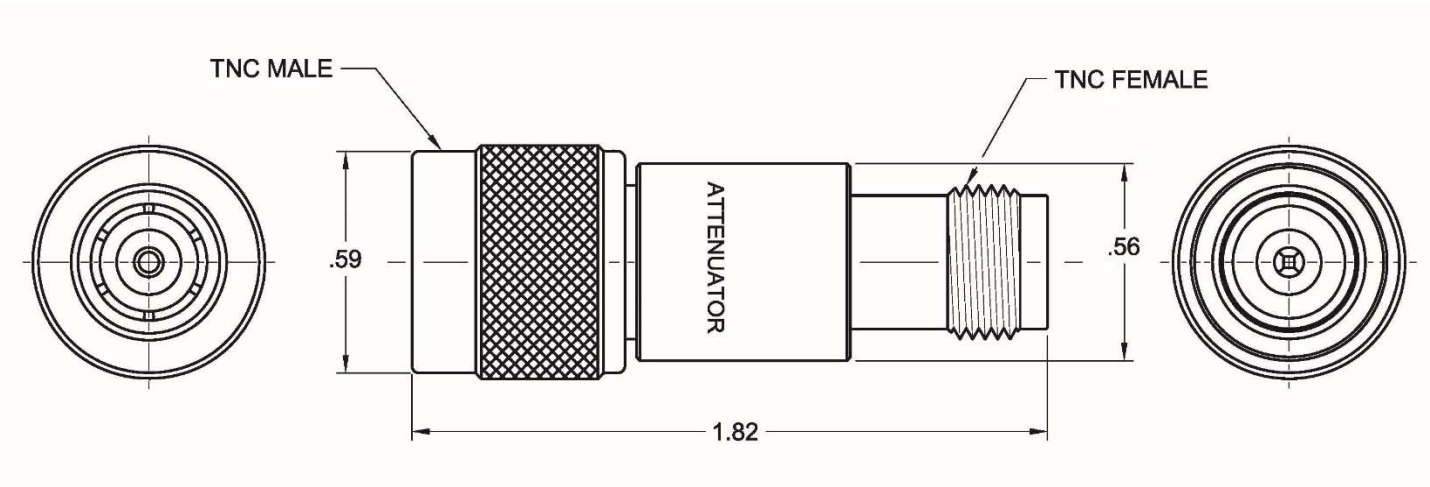

Anatech Microwave Company

70 Outwater Lane Garfield, NJ 07026, USA

Phone: (973) 772-4242

Email: sales@anatechmicrowave.com

Web: www.anatechmicrowave.com