

Electrical Specifications

Frequency Range:

DC-1.0 GHz

1.0-4.0 GHz

Attenuation Value: 20 dB

Attenuation Tolerance:

± 0.25 dB; ± 0.50 dB

± 0.50 dB; ± 0.75 dB

VSWR:

1.25:1 Max.

1.35:1 Max.

Average Power: 20 Watts

Peak Power: 1000 Watts

Mechanical

Connector Type: N-Type (M/F)


Dimensions: 3.71 x 1.75 Inches.

Environmental


Operating Temperature: -55°C to +85°C

Storage Temperature: -65°C to +105°C

Outline Drawing:

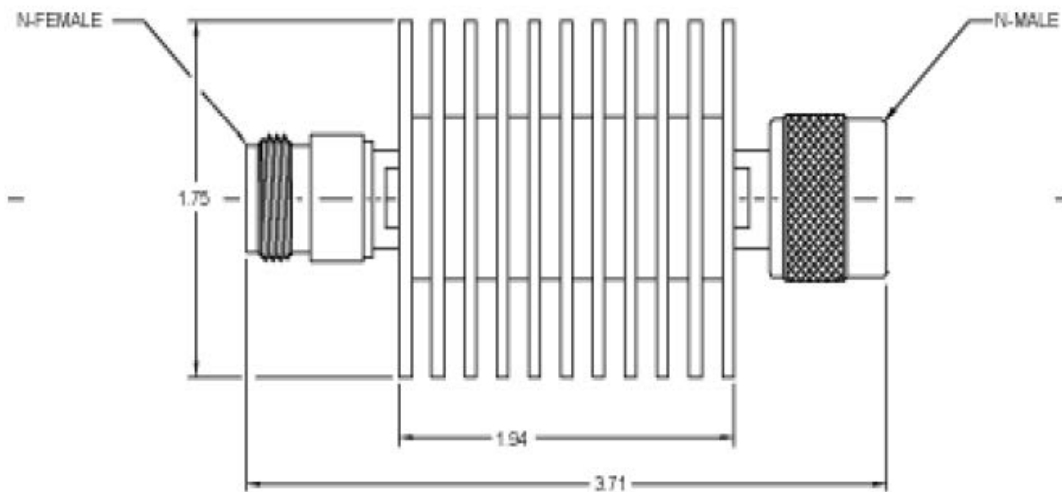

Outline Drawing:

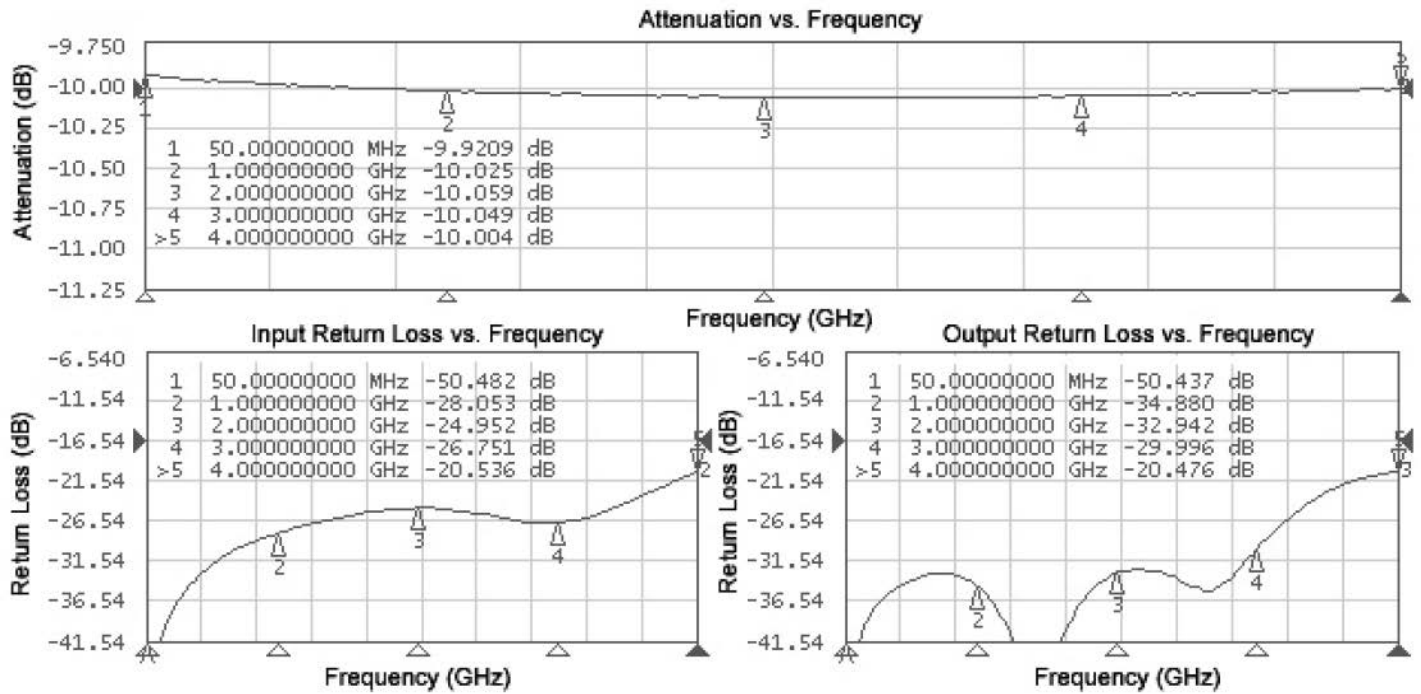

*10 dB attenuator shown, flatness identical at other attenuation levels