

Electrical Specifications

Frequency Range: 5-2000 MHz
Insertion Loss: 1.5 dB Max.
Isolation: 22 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 6° Max.
VSWR: 1.50:1 Max.
Power Rating: 1 Watt Max.


Mechanical

Mounting Method: Thru Holes
Connector Type: SMA (F)
Dimensions: 0.900 x 0.900 x 0.500 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

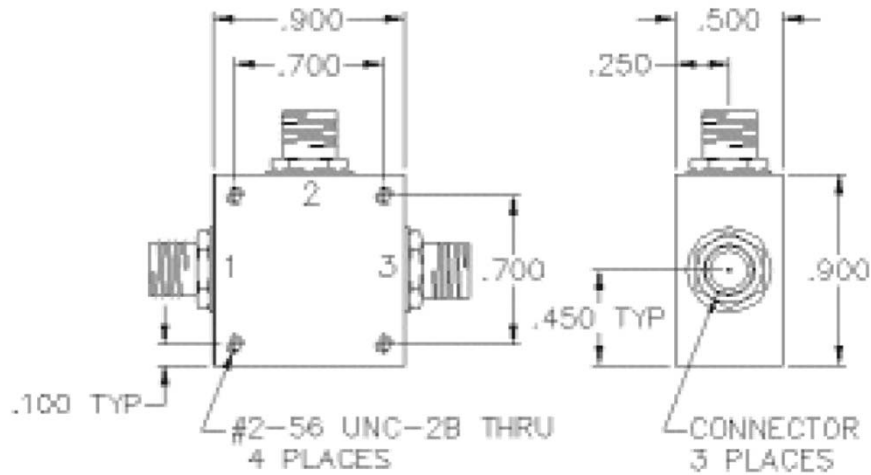

Port Configuration

Input: 2

Outputs: 1, 3