

Electrical Specifications

Frequency Range: 5-2000 MHz
Insertion Loss: 2.8 dB Max.
Isolation: 20 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 8° Max.
VSWR: 1.60:1 Max.
Power Rating: 1 Watt Max.

Mechanical


Mounting Method: Threaded Mounting Holes
Connector Type: SMA
Dimensions: 1.250 x 1.250 x 0.750 in.

Environmental

Operating Temperature: -40 to +85°C
Storage Temperature: -55 to +125°C
Shock: 20 G. 11 ms.
Vibration: 20 G. 5 to 200 Hz.

*Note: Available with BNC, TNC, F, and N connectors.

Outline Drawing:

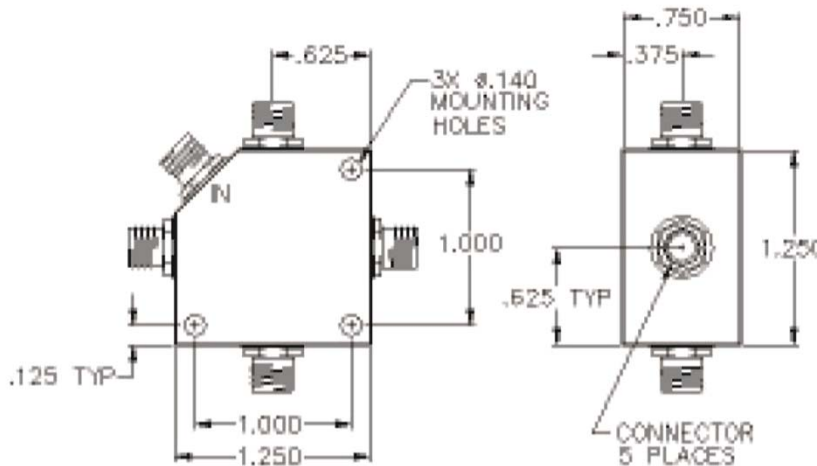

Port Configuration
 Input: 1
 Output: 2, 3, 4, 5
 Ground: Housing