

**Electrical Specifications**

**Frequency Range:** 0.5-26.5 GHz  
**Coupling:** 10 ±0.8 dB  
**Insertion Loss:** 2.2 dB  
**Directivity:** 14 dB  
**VSWR:** 1.4:1 max  
**Power Handling:** 20 W CW, 3 Kw Peak


**Mechanical**

**Connector Type:** SMA (F)  
**Dimensions:** 111.8 x 17.8 x 12.7 mm

**Environmental**


**Operating Temperature:** -35 to 105°C  
**Storage Temperature:** -55 to +125°C

**Outline Drawing:**

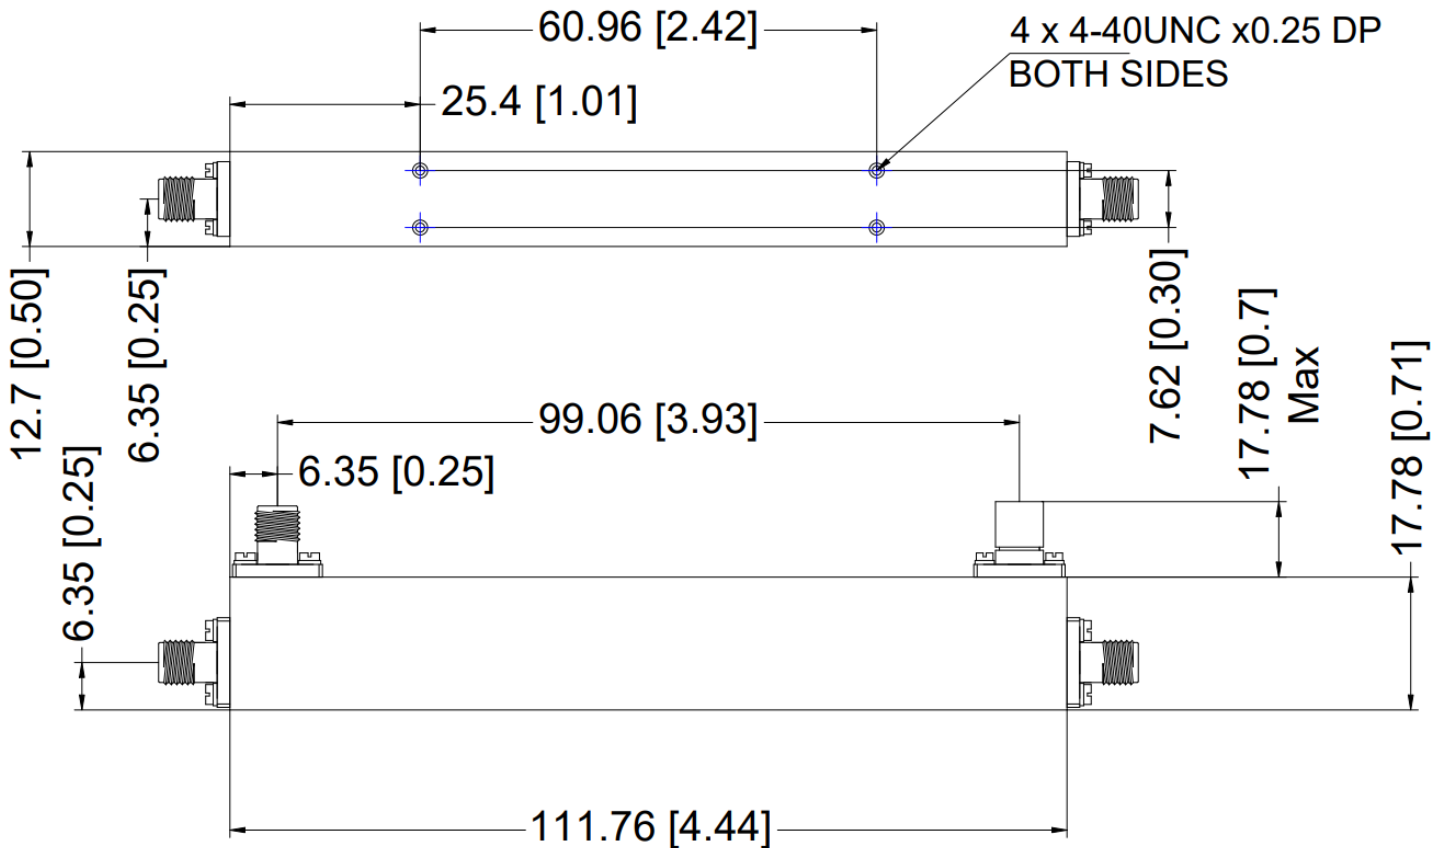


DS-DC1259-06242019-Rev1

**Response Plot:**

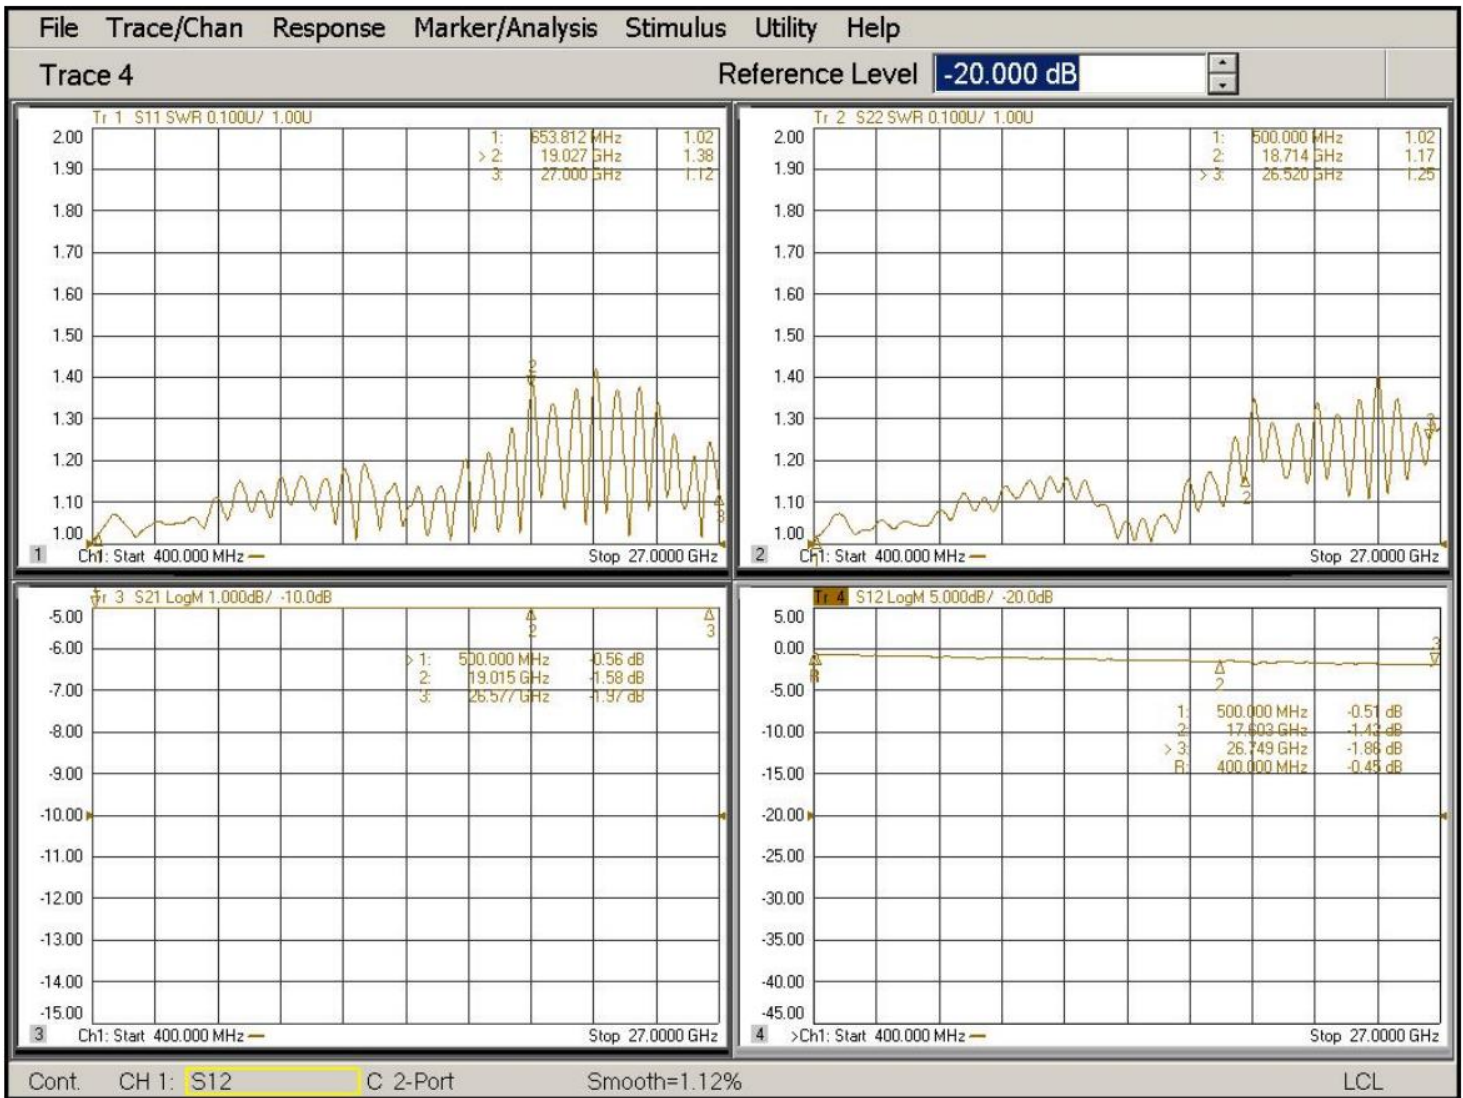

DS-DC1259-06242019-Rev1

**Response Plot:**

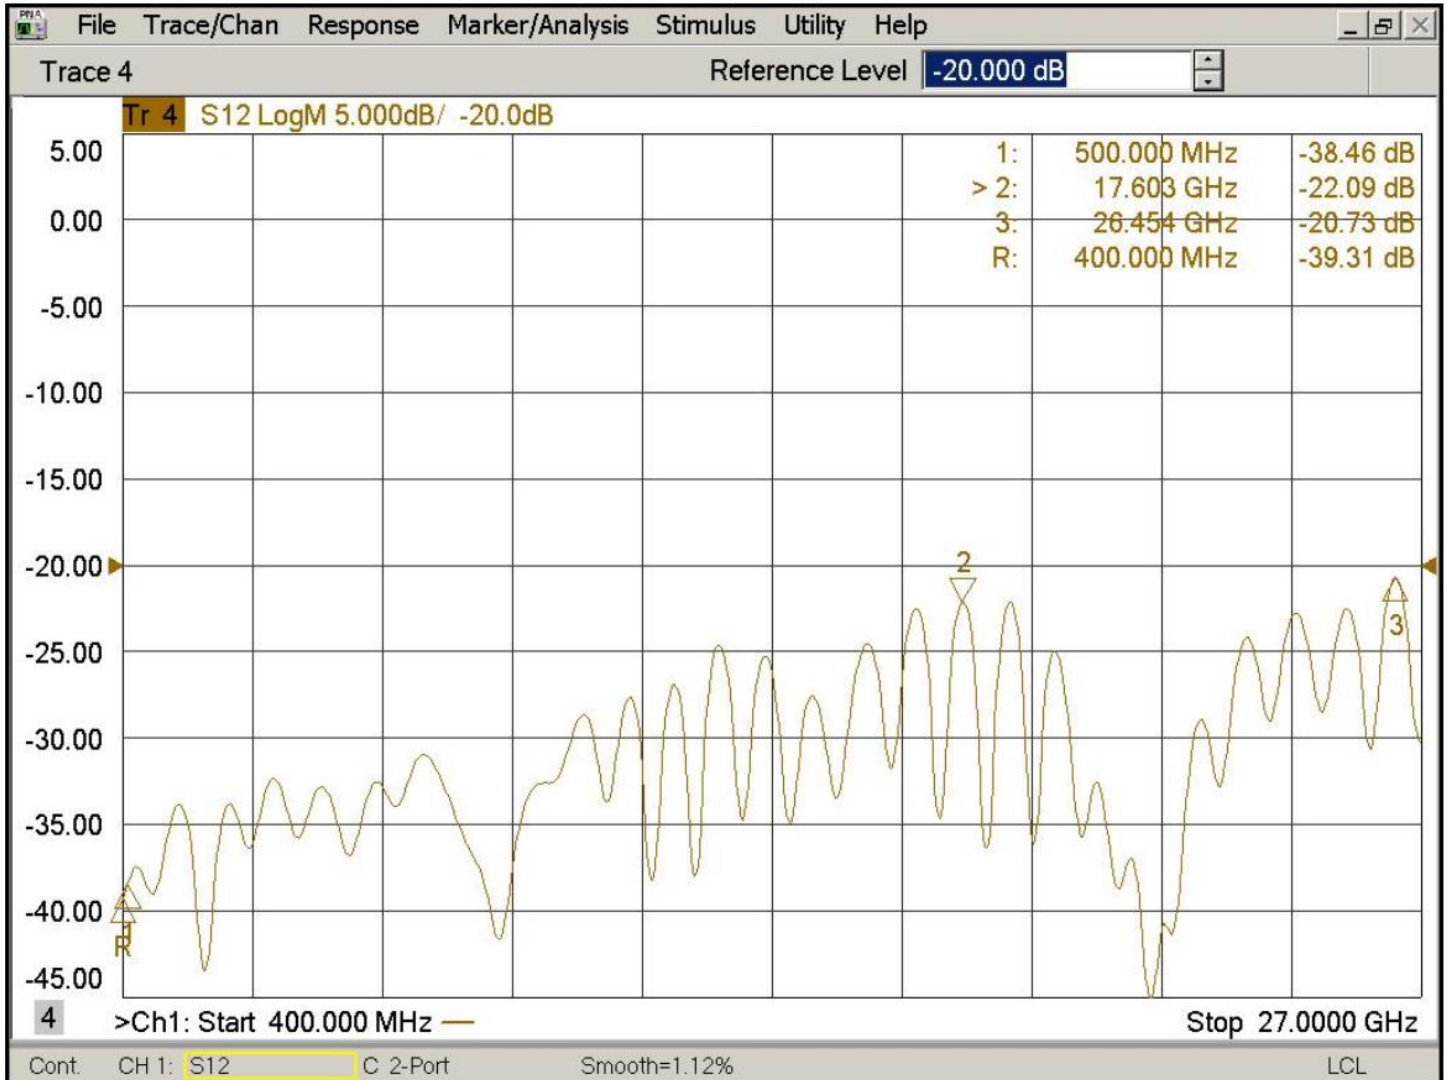

DS-DC1259-06242019-Rev1