0.5-6.0 GHz 8 Way Power Divider

Part Number: AM500-6000PD8-1276

Electrical Specifications

Frequency Range: 0.5-6.0 GHz
Insertion Loss : 1.5 dB Max.
Isolation: 20 dB Min.
Amplitude Balance: 0.4 dB Max.
Phase Balance: 8.0˚ Max.
VSWR (Input/Output): 1.40:1 Max.

Mechanical

Mounting Method: Threaded Mounting Holes
Connector Type: SMA
Dimensions: 5.00 x 7.50 x 0.40 in.

Environmental

Operating Temperature: -40 to +85˚C
Storage Temperature: -55 to +95˚C
Shock: 20 G. 11ms
Vibration: 20 G. 5 to 200 MHz

*Note: Available with BNC, TNC, and F, connectors.

Outline Drawing:

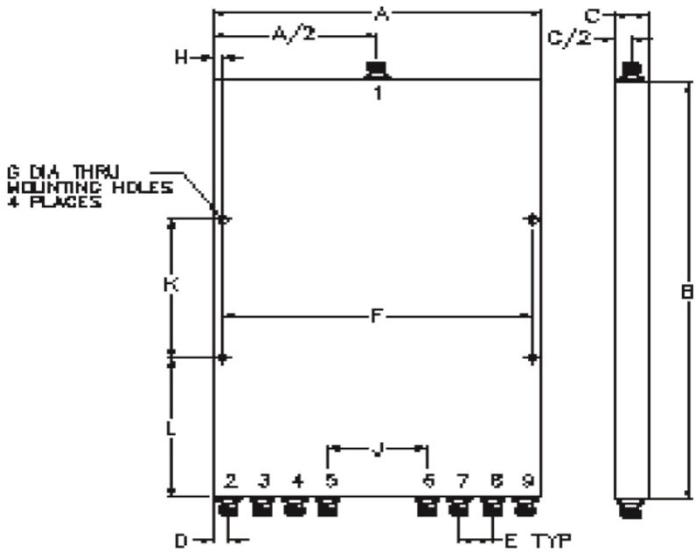

Dimensions:

A: 5.00	B: 7.50
C: 0.40	D: 0.25
E: 0.50	F: 4.70
G: 0.150	H: 0.150
J: 1.50	K: 2.50
L: 2.50	

Anatech Microwave Company

70 Outwater Lane Garfield, NJ 07026, USA

Phone: (973) 772-4242

Email: sales@anatechmicrowave.com

Web: www.anatechmicrowave.com