

Electrical Specifications

Frequency Range: DC-6.0 GHz

Attenuation: 30 dB

Attenuation Tolerance:

DC-6.0 GHz; ± 0.70 dB

6.0-12.4 GHz; ± 0.70 dB

12.4-18.0 GHz; ± 1.00 dB

VSWR:

DC-6.0 GHz; 1.20:1 Max.

6.0-12.4 GHz; 1.30:1 Max.

12.4-18.0 GHz; 1.40:1 Max.

Average Power: 10 Watts

Peak Power: 500 Watts

Mechanical

Connector Type: N-Type (M/F)


Dimensions: 2.66 x 1.00 Inches.

Environmental

Operating Temperature: -55°C to +85°C

Storage Temperature: -65°C to +105°C

Outline Drawing:

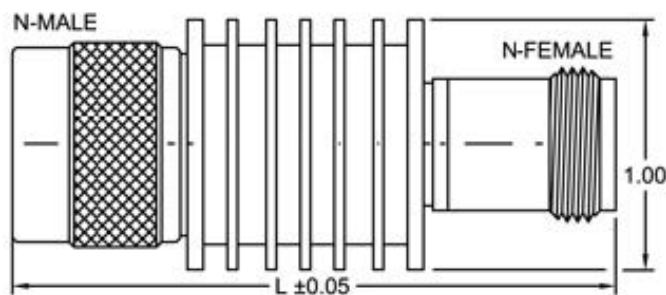

ATTENUATOR VALUE	"L"
3, 6, 10 & 20	2.41
30 & 40	2.66