

**Electrical Specifications**

**Frequency Range:** DC-6.0 GHz

**Attenuation:** 20 dB

**Attenuation Tolerance:**

DC-6.0 GHz;  $\pm 0.50$  dB

6.0-12.4 GHz;  $\pm 0.50$  dB

12.4-18.0 GHz;  $\pm 0.70$  dB

**VSWR:**

DC-6.0 GHz; 1.20:1 Max.

6.0-12.4 GHz; 1.30:1 Max.

12.4-18.0 GHz; 1.40:1 Max.

**Average Power:** 10 Watts

**Peak Power:** 500 Watts

**Mechanical**

**Connector Type:** N-Type (M/F)


**Dimensions:** 2.41 x 1.00 Inches.

**Environmental**

**Operating Temperature:** -55°C to +85°C

**Storage Temperature:** -65°C to +105°C

**Outline Drawing:**

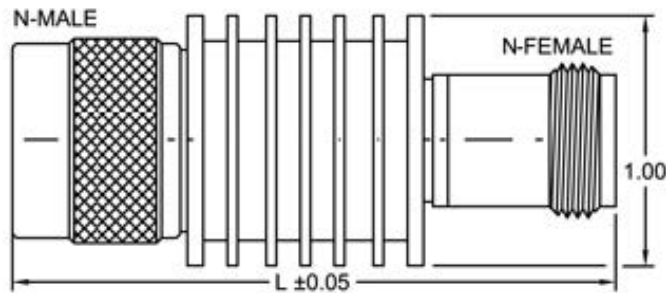

ATTENUATOR VALUE	"L"
3, 6, 10 & 20	2.41
30 & 40	2.66