

Electrical Specifications

Frequency Range: 800-900 MHz

Insertion Loss: 5.3 dB Max.

Isolation: 20 dB Min.

Amplitude Balance: 0.3 dB Max.

Phase Balance: 3° Max.

VSWR: 1.20:1 Min.

Impedance: 50 Ohms

Power Rating: 1 Watt Max.

Peak Power: 10 Watts

Mechanical

Mounting Method: SMA (F)

Dimensions: 12.0'4 x 5.0'4 x 6.0 mm

Weight: 50.0 g Max.

Environmental


Operating Temperature: -20 to +60°C

Storage Temperature: -55 to +125°C

Shock: 20 G. 11 ms.

Vibration: 20 G. 5 to 200 Hz.

Outline Drawing:

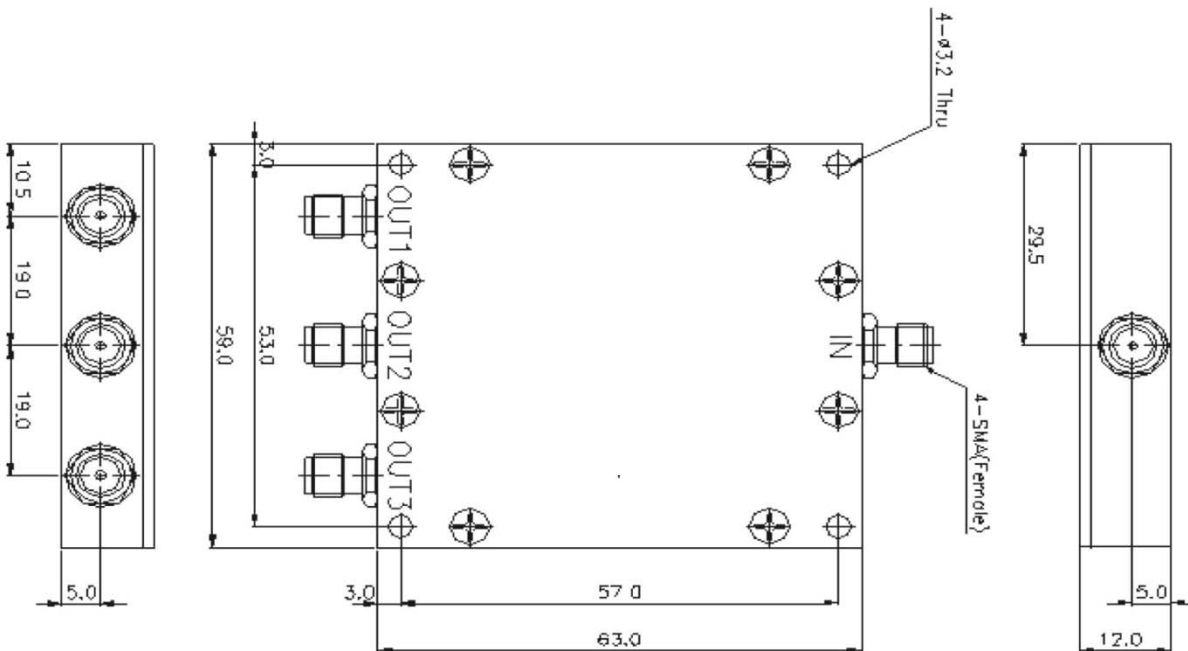

Test Data:

