

**Electrical Specifications**

**Frequency Range:** 800-900 MHz  
**Insertion Loss:** 6.5 dB Max.  
**Isolation:** 20 dB Min.  
**Amplitude Unbalance:** 0.3 dB Max.  
**Phase Unbalance:** 3° Max.  
**VSWR:** 1.20:1 Max.  
**Power Rating:** 1 Watt Max.  
**Peak Power:** 10 Watts


**Mechanical**

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 2.04 x 2.55 x 0.472 in.

**Environmental**

**Operating Temperature:** -20°C to +60°C  
**Storage Temperature:** -55 to +125°C  
**Shock:** 20 G. 11 ms.  
**Vibration:** 20 G. 5 to 200 Hz.

**Outline Drawing:**

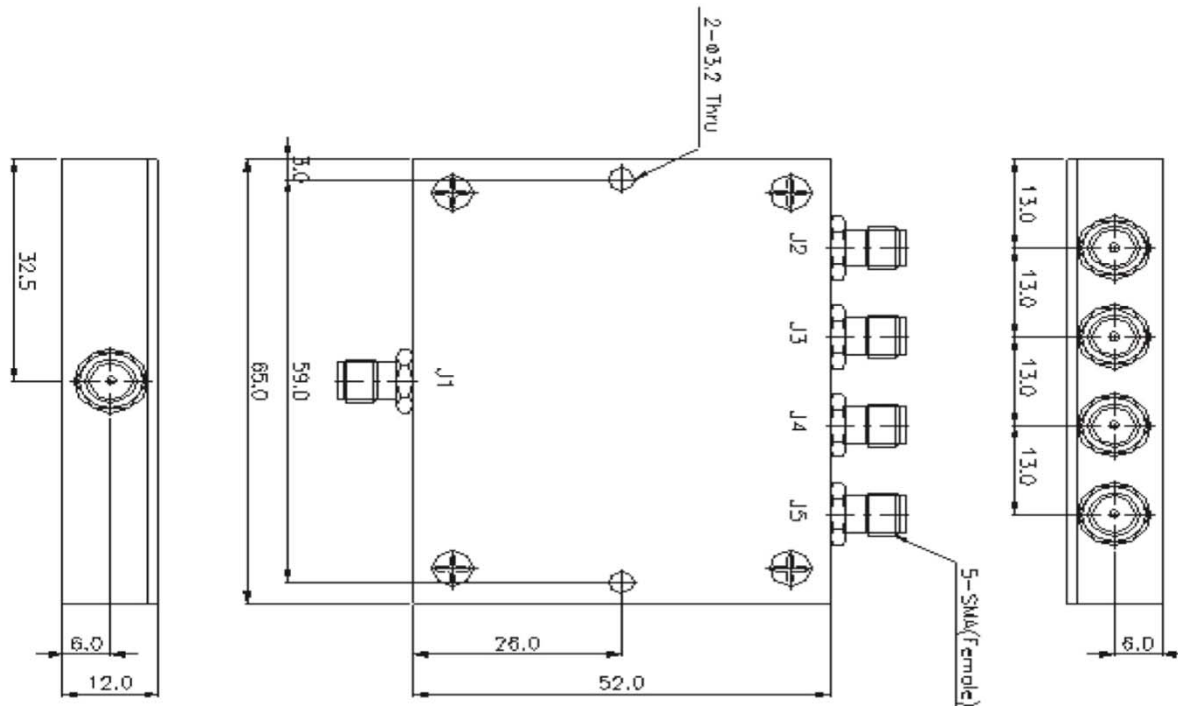

**Outline Drawing:**

