

Electrical Specifications

Frequency Range: 0.85-1.7 GHz

Insertion Loss: 0.8 dB Max.

Isolation: 20 dB Min.

Amplitude Balance: 0.4 dB Max.

Phase Balance: 5° Max.

VSWR: 1.30:1 Max.

Power Rating: 1 Watt Max.

Mechanical

Mounting Method: Threaded Mounting Holes

Connector Type: N-Type

Dimensions: 8.00 x 3.00 x 1.00 in.

Environmental

Operating Temperature: -40 to +85°C


Storage Temperature: -55 to +125°C

Shock: 20 G. 11 ms.

Vibration: 20 G. 5 to 200 Hz.

*Note: Available with BNC, TNC, and F connectors.

Outline Drawing:

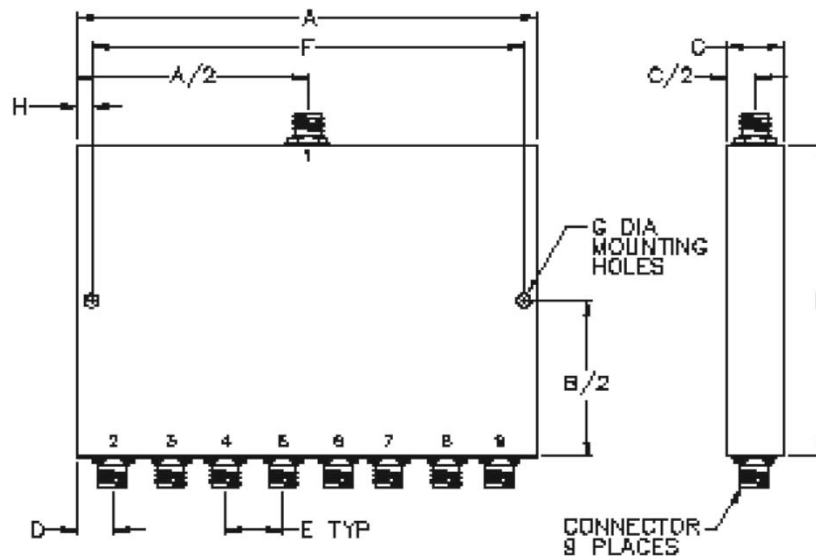

Dimensions:

A: 4.50	B: 3.00
C: 0.40	D: .50
E: .50	F: 4.00
G: .125	H: .250