

Electrical Specifications


Frequency Range: 0.950 – 1.450 GHz
Bandwidth: 0.50 GHz
Insertion Loss: 0.7 dB Max
Isolation: 18 dB Min
VSWR: 1.35 Max
Impedance: 50 Ohms In/Out
Peak Power: 100 W
Average Power: 50 W

Mechanical

Connector Type: SMA Female
Dimensions: 70 x 70 x 22 mm

Environmental

Operating Temperature: 0 to +50° C

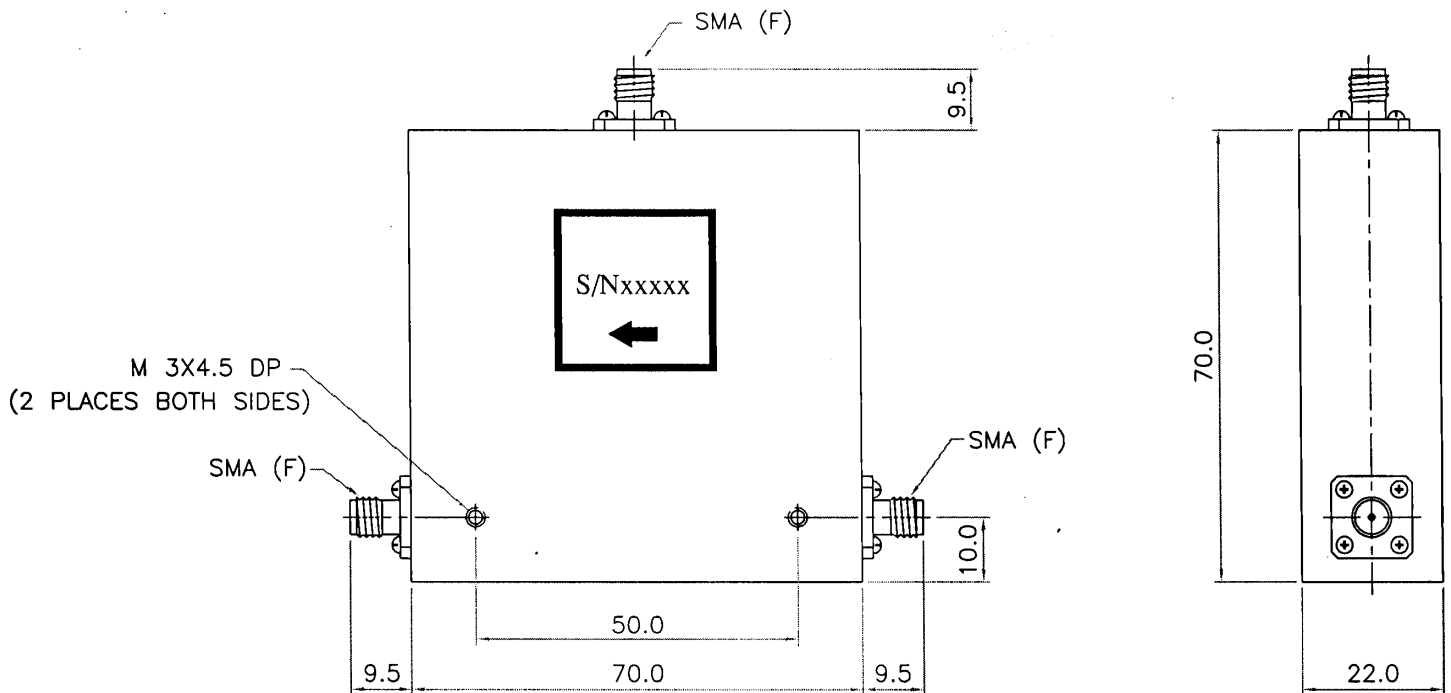

DS-CIR196-06242019-Rev0