

Electrical Specifications

Frequency Range: 0.75 - 75 MHz
Coupling: 10 +/- 0.3 dB
Coupling Flatness: +/- 0.2 dB Max.
Mainline Loss: 0.35 Max.
 (Above Theoretical 0.46 dB Loss)
Directivity: 30 dB Min.
VSWR: 1.15:1 Max
Input Power: 5 Watts Max


Mechanical

Dimensions: 0.800 x 0.410 x 0.400 in.

Environmental

Operating Temperature: -54 to 100° C

Outline Drawing:

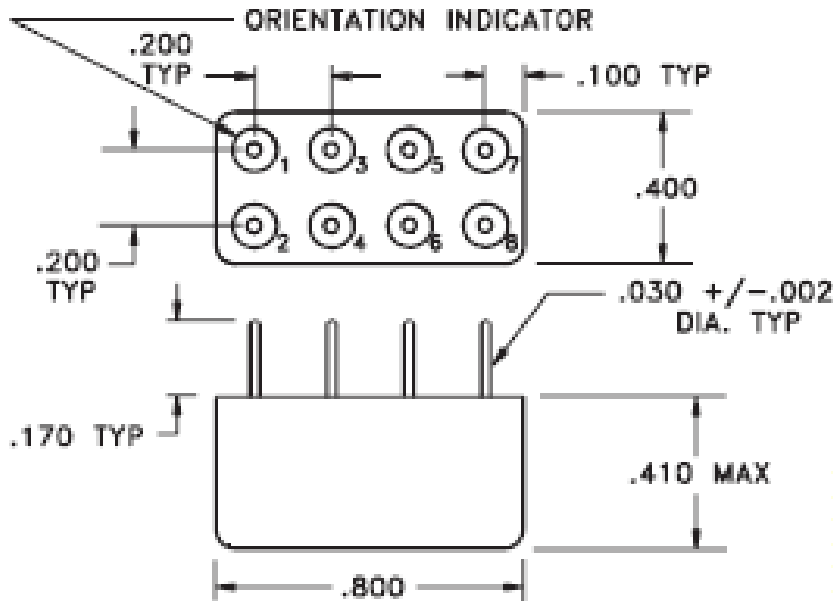

Pinout Table
 Port 1 - Input
 Port 2 - Output
 Port 7 - Coupled
 Ports 3,4,5,6,8 - Ground